

MF125F

Compact fixed chamber balers



VISION INNOVATION LEADERSHIP QUALITY RELIABILITY SUPPORT PRIDE COMMITMENT



MASSEY FERGUSON



Simple and reliable round baler

The compact MF 125F is a simple and very reliable full chain baler producing bales with a diameter of 1.20m. The baler has a low weight with minimum power requirement and is very easy to operate.

Full chain baler concept

The MF 125F features a full chain and slat chamber concept. The chain and slat chamber provides a firm grip on the bale and ensures early and constant bale rotation. The tail gate has a completely enclosed design to reduce crop loss to a minimum.

Fork feeder for huge intake capacity

The 125F is fitted with a cost efficient fork feeder intake system. This system provides direct

feed into the bale chamber, and the wide opening allows almost unrestricted intake capacity for fast and efficient bale start. The fork feeder is provided with a crop press above the pick-up that ensures a regular crop flow even from large bulky swaths.

Net wrap

Using a reliable net wrap application system, the 125F baler ensure full coverage right to the edge of the bale. It's a system that provides considerable savings on

net consumption, giving the bale excellent transport and stacking properties.

Twine tying

The simple twine tying system with double twine application is a cost-saving option, keeping binding time to the minimum. The tying cycle is started automatically or manually by the Alpha monitor from the tractor cab. Both facility and confort are combine on this controler.

01 Full chain baler concept.


02 The MF 125F is fitted with a cost efficient fork feeder intake system.

03 The MF 125F is fitted with a 1.7 or 2.0m wide pick-up.

04 Twine tying.

Specifications

Every effort has been made to ensure that the information contained in this publication is as accurate and current as possible. However, inaccuracies, errors or omissions may occur and details of the specifications may be changed at any time without notice. Therefore, all specifications should be confirmed with your Massey Ferguson Dealer or Distributor prior to any purchase.

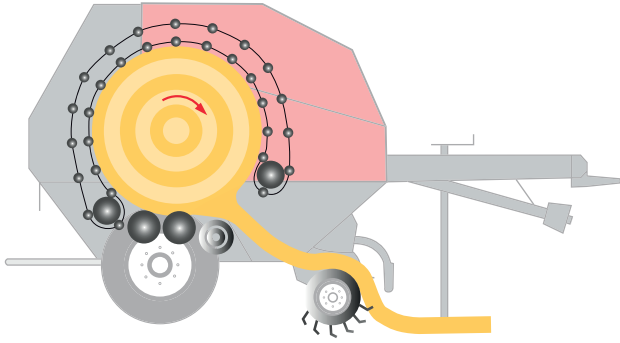

01



02



03



04

Weight and dimensions		125F
Length	m	3.60
Width	m	2.24
Height	m	1.95
Weight	kg	1840
Bale chamber		
Slats	nb	30
Diameter	m	1.20
Width	m	1.20
Bale ramp		●
Pick-up		
Working width	cm	170
Number of tine rows		4
Tine spacing	mm	60
Short crop device		Crop deflector
Pneumatic gauge wheels		●
Intake		
Fork Feeder		●
Driveline		
W-A PTO shaft		○
Shear bolt protection		●
Binding		
Twine (double) / Capacity	m	● / 4
Net / Capacity	m	○ / 1
Net & Twine / Capacity	m	○ / 1&4
Operations		
Alpha monitor (Electric)		●
Hydraulic outlets		1SA+1DA
Wheels and Axles		
11.5/80-15		●
15.0/55-17		○
19.0/45-17		-
500/45-22.5		-
Hydraulic brakes		-
Pneumatic brakes		-
Others		
Reversible linkage (up & down)		●
PTO	rpm	540
Min power req.	kW/hp	37/50

- = Standard
- = Optional
- = Not available

MF 125F highlights

Here's a quick reminder of some of the superb features that Massey Ferguson balers have to offer, firmly enhancing their place within the harvesting sector.

01 Simple and reliable full chain and slat fixed chamber baler.

02 1.7 or 2.0m wide pick-up.

03 Cost efficient fork feeder intake system.

04 Bale diameter of 1.20m.

05 Net or twine wrapping.

